

**NEW**



# Lumitex<sup>®</sup> LED Lighting

## High Performance Commercial LED Downlight

**COB**  
"Chips On Board"  
Technology



- Up to 70% energy savings
- Safe - No fire risk
- No Mercury
- Quality construction
- Three year Warranty
- 35,000hrs lamp life

### *Applications*

- ✓ Office
- ✓ Retail
- ✓ Commercial
- ✓ Schools

Finally, a viable replacement for PL series CFL fittings for new or retrofit installations in commercial environments. Lumitex COB downlights offer high lumen output with an impressive wide beam angle in three cut-out sizes to suit most applications. COB technology allows a lightweight fitting, which translates to easier installation and useful reduction of ceiling loads. High efficiency solid state lighting provides significant energy and maintenance savings with the benefit of reliable operation in critical environments.



**Lumitex<sup>®</sup>**  
LED Lighting

An Australian Company  
working with LEDs since 1996

Please visit  
[www.lumitex.com.au](http://www.lumitex.com.au)  
to find your  
nearest distributor



**Lighting Council**  
AUSTRALIA MEMBER 2011

# A No-Mercury Alternative to CFLs

## SPECIFICATIONS

- Design: COB Technology
- CRI: >85
- Beam Angle: 100°
- Diffused glass cover
- Low Heat Emission
- Powdercoated alloy frame
- AC Input: 240 Vac
- Power Factor: >90
- EMC: 300MHz Compliant
- Safety: IEC/EN61347.2.13
- 3 Year Warranty<sup>1</sup>
- Non-dimmable




Supplied with driver, flex and plug

## Models


Watts	Part Number	Colour Temp	Frame	Cut-out	Dimensions
15W	LUM15CWCOW	5500K	White	160mm	D182mm x H119mm
15W	LUM15WWCOW	3000K	White	160mm	D182mm x H119mm
20W	LUM20CWCOW	5500K	White	175mm	D200mm x H121mm
20W	LUM20WWCOW	3000K	White	175mm	D200mm x H121mm
30W	LUM30CWCOW	5500K	White	203mm	D228mm x H131mm
30W	LUM30WWCOW	3000K	White	203mm	D228mm x H131mm

## Approximate Comparison Chart


2 x 13W CFL	15W LED COB
2 x 18W CFL	20W LED COB
2 x 26W CFL	30W LED COB

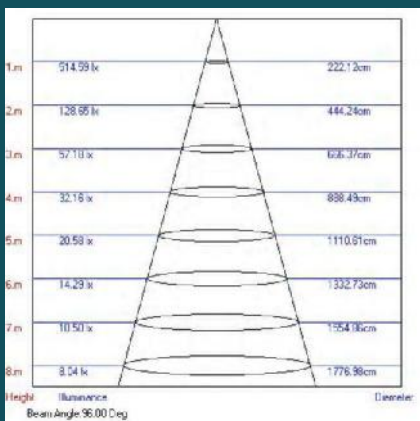

15W COB LED Lux Chart

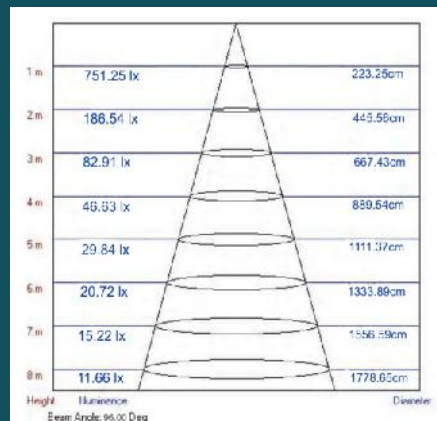

20W COB LED Lux Chart

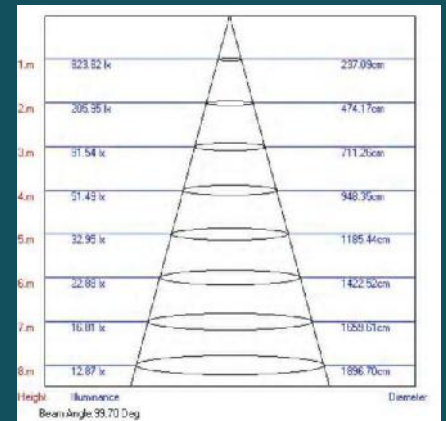

30W COB LED Lux Chart

Lux charts shown are for cool white colour temperatures



N23895

<sup>1</sup>Warranty subject to terms and conditions of sale. Please visit [www.lumitex.com.au](http://www.lumitex.com.au)

V1.1  
02\_07\_2011